
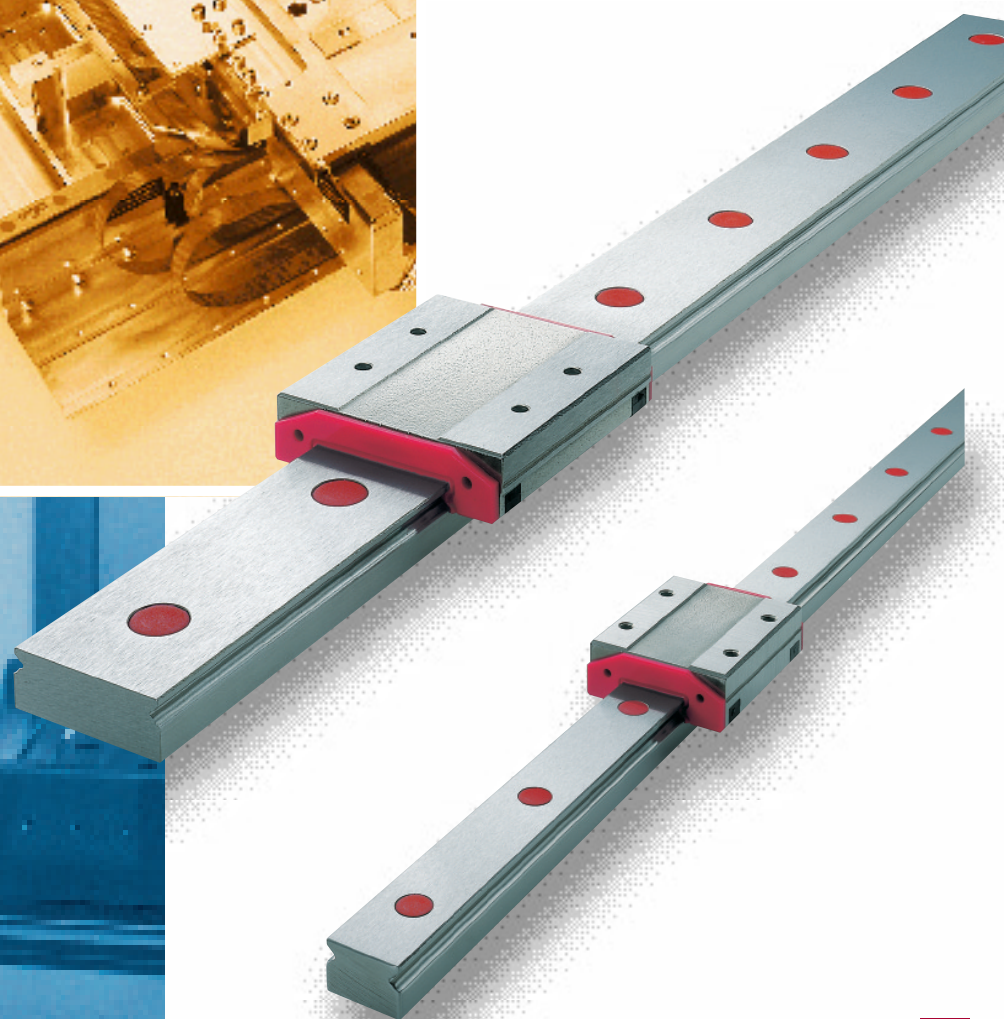


**SCHNEEBERGER**  
LINEAR TECHNOLOGY

## MINIRAIL

The Miniature Guideway

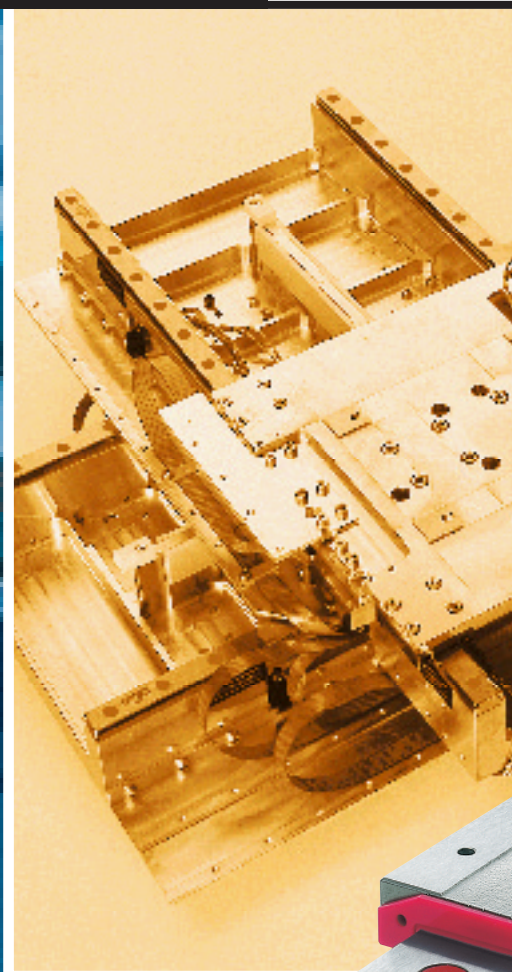

**NEW**  
wide ranges included

## Table of Contents

<b>1 Product Overview</b>	
1.1 MINIRAIL	2
<b>2 Technical Data</b>	
2.1 Accuracy classes	8
2.2 Running accuracy $\Delta$	8
2.3 Preload classes V0, V1	8
2.4 Rail information	9
2.5 Lubrication	10
2.6 General data	11
<b>3 Dimension tables and ordering information</b>	
3.1 Dimension table, loading capacities MINIRAIL sizes 7, 9, 12, 15	12
3.2 Dimension table, loading capacities MINIRAIL sizes 14, 18, 24, 42	13
3.3 Accessories	14
3.4 Ordering information MN	15
<b>4 Dimensioning</b>	
4.1 Dynamic loading capacity C	16
<b>5 Mounting guidelines</b>	
5.1 Tightening torques for rails and carriages	17
5.2 Configuration of the lateral location sides	18
5.3 Configuration of assembly surfaces	18
5.4 Geometrical and position accuracy of the support surfaces	19
5.5 Parallelism tolerances of the locating surfaces	19
5.6 Various	20

## Product Overview

### MINIRAIL - the range of high-precision guideways

#### MINIRAIL – The 2-row miniature ball and rail guideway with high stability


A quality product in accordance with the latest technological designs, consisting of a minimum number of components.

#### MINIRAIL


##### in 8 sizes according to DIN standards

All installation and connection dimensions are in accordance with the DIN standard 645-2. The type designation of the individual products refers to the rail width in mm (e.g., MN 14 = rail width 14 mm). The design of the running tracks is based on the proprietary SCHNEEBERGER know-how. An interchangeability of rail and carriages exists within the MINIRAIL ranges.

#### MINIRAIL Wide Sizes

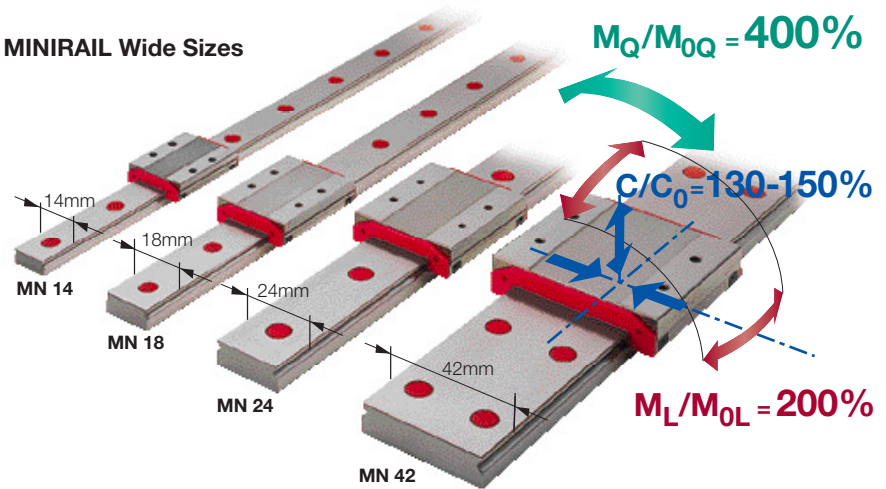

#### MINIRAIL Standard Sizes

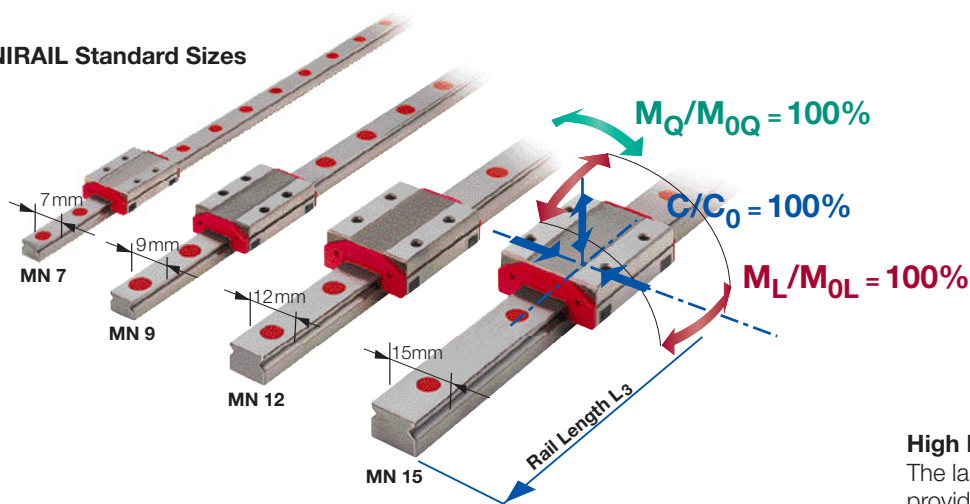

#### Rail Length L<sub>3</sub>

Our manufacturing know-how makes it possible to produce precision rail lengths up to 980 mm, depending on the rail size. For custom applications, intermediate lengths are available.

#### High Load Values and Torque


The large number of load-bearing balls provide the carriages with high permissible load values and torque. The MINIRAIL wide series in essence differ in the permissible transverse torque  $M_Q$ , which is up to 400% higher than that of the standard sizes.

Load-bearing values in accordance with the calculation DIN 636, part 2:  
 $C_0$  = static load  
 $C$  = dynamic load (100 km)  
 $M_0$  = static torque  
 $M$  = dynamic torque (100 km)

## MINIRAIL in two accuracy grades: **G3** and **G1**

Depending on the requirements of your application, you have the choice of two accuracy grades: precision G3 and high-precision G1.

	Tolerances:	
	A / B <sub>2</sub>	$\Delta A / \Delta B_2$
<b>G1, high-precision</b>	$\pm 10 \mu\text{m}$	$7 \mu\text{m}$
<b>G3, precision</b>	$\pm 20 \mu\text{m}$	$15 \mu\text{m}$

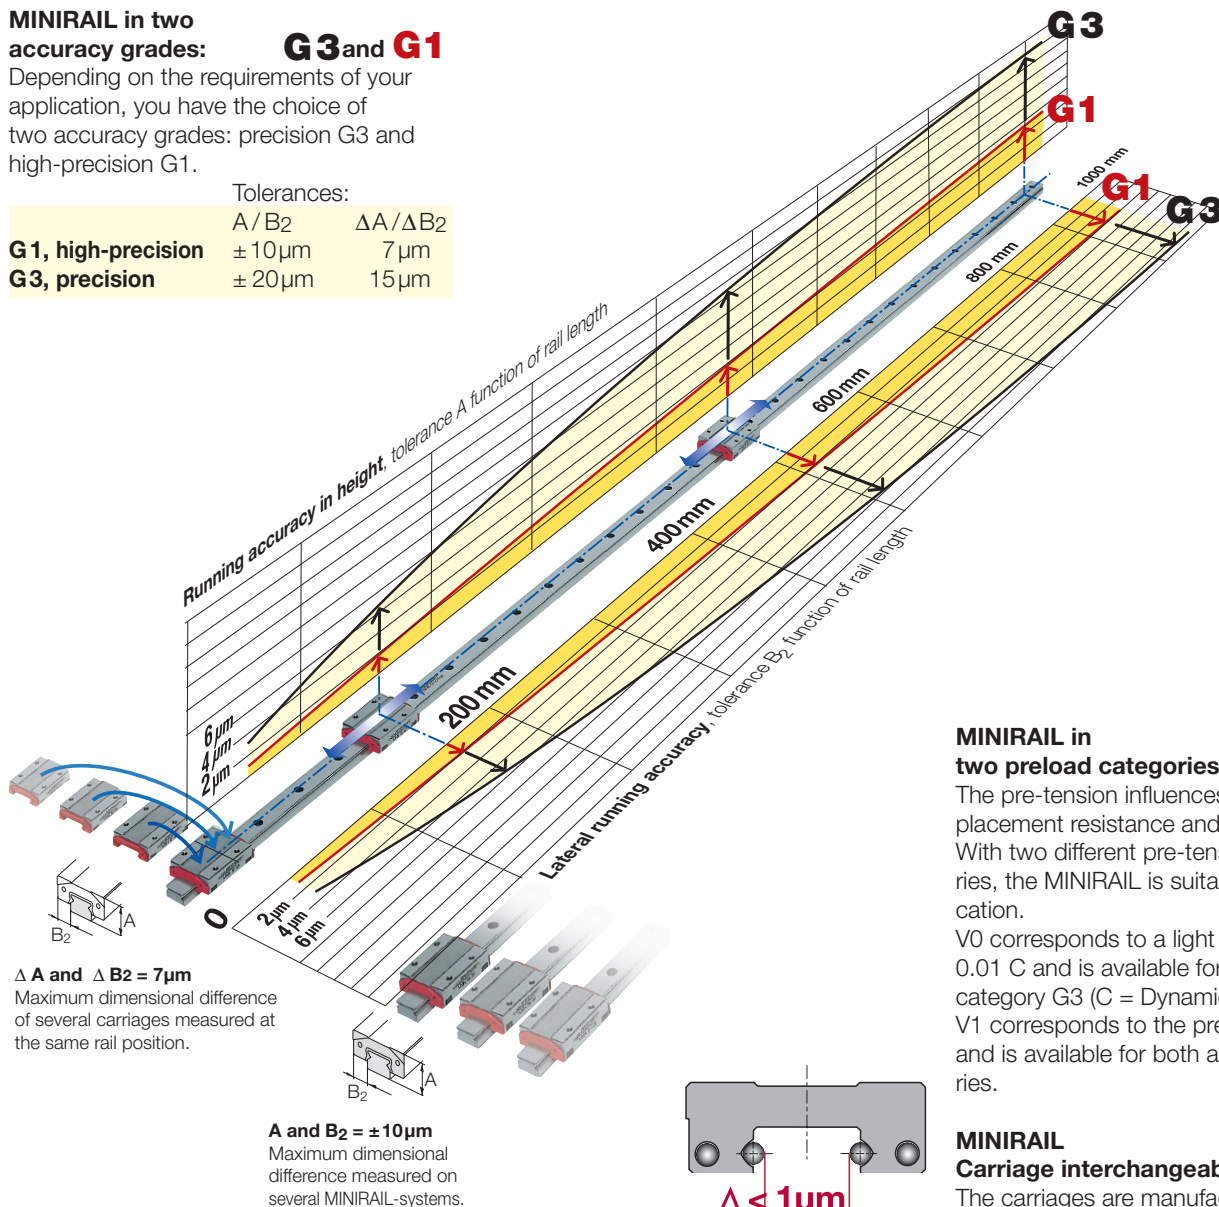

### μm - Accuracy

Our manufacturing control of this precise dimension is decisive for the complete interchangeability of the rails from assembly to assembly and rail to rail.

## MINIRAIL in two preload categories: **V0** and **V1**

The pre-tension influences the rigidity, displacement resistance and service lifetime. With two different pre-tensioning categories, the MINIRAIL is suitable for your application.

V0 corresponds to a light preload of up to 0.01 C and is available for the accuracy category G3 (C = Dynamic load).

V1 corresponds to the preload 0 to 0.03 C and is available for both accuracy categories.

### MINIRAIL

#### Carriage interchangeability guarantee

The carriages are manufactured with high precision and are completely interchangeable. This makes a high degree of flexibility with respect to operations planning, stocking and assembly. As a result of the interchangeability, additional carriages can be installed onto an existing rail.



## MINIRAIL – Perfection to the last detail for the latest requirements of the technology:

- High accelerations of up to  $300 \text{ m/s}^2$
- Incomparable


### High acceleration values call for new solutions

In the case of gearwheel or ball screw drives, the maximum speed was limited by the design of the linear guideway. In newer designs, the guideway is subjected to very high stresses as a result of the use of linear motors - the acceleration values have highly increased. Schneeberger's recirculation element (shown here) has been developed to withstand high stresses from demanding applications.




### Optimized Material Selection

The ball recirculation devices are made out of a plastic material, which is capable of being subjected to high loads. The smooth running track surfaces are perfectly capable of accommodating the enormous centrifugal forces of the balls.

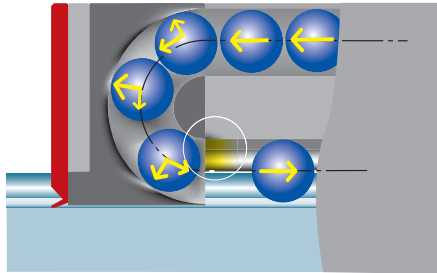



### The Ball Entry Zone - A Decisive Point

The precise fine grinding of the ball entry position on the running track is crucial to the operational quietness and service life, especially in the case of carriages with pre-load. Here we have indeed produced our best work!

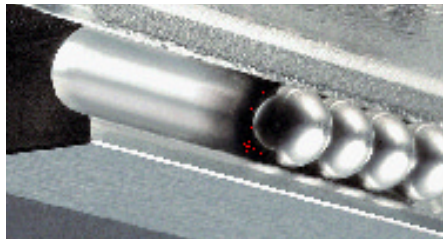


### Direct Lubrication

Two lubrication bores in each front plates allow the direct lubrication of the ball recirculation system. The initial lubrication is applied at Schneeberger.

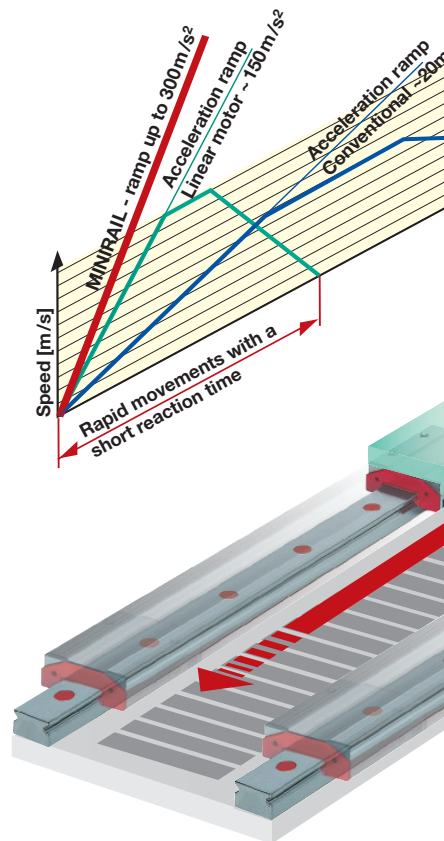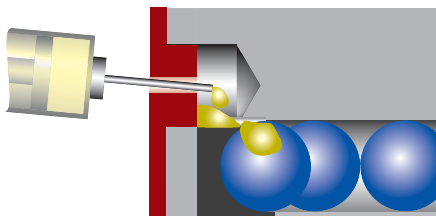

smoothness • Durable precision

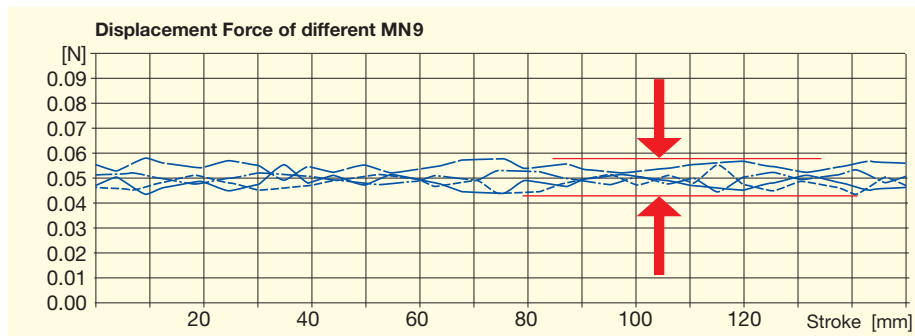

### Measurable Smoothness and Displacement Force

Running quietness and displacement force are important characteristic features of the guideway. The MINIRAIL carriages are interchangeable and the values from carriage to carriage must only vary to the least possible degree.



### Carriages without Front Plates

Should the protective - and wiping function of the front plates not be required, the front plates can be removed easily. As a result, the displacement resistance is reduced significantly.

### Carefully Contoured Front Plates



To obtain quietness and extended life, rail and carriage assemblies require clean running surfaces - even under unfavorable conditions. Our MINIRAIL carriages are equipped with rail-wiping, contoured front plates.

Time [s]

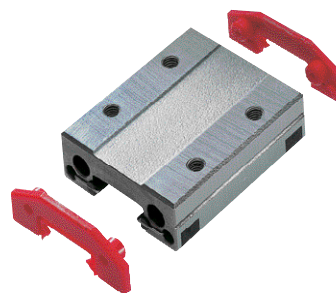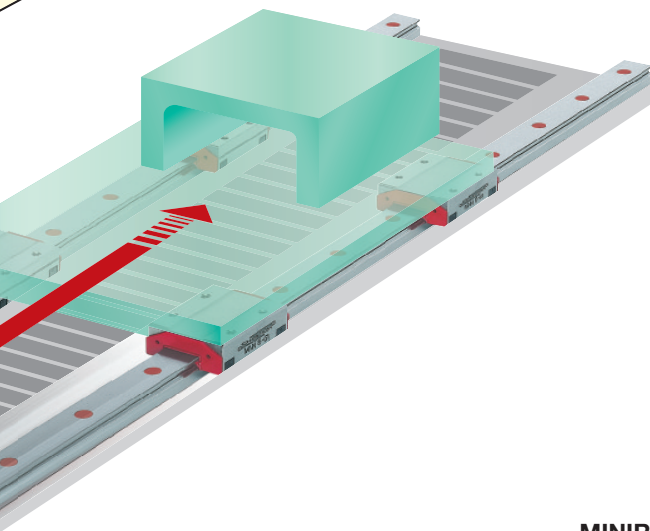

### MINIRAIL rails and carriages

All rails and carriages are manufactured from corrosion-resistant, through-hardened steel and are suitable for utilization in the most diverse applications, such as clean room conditions.

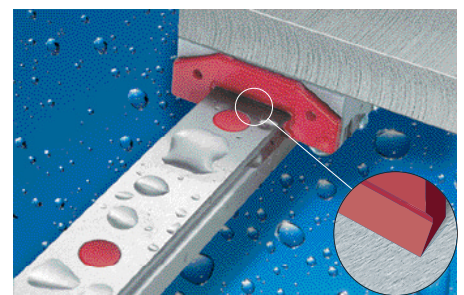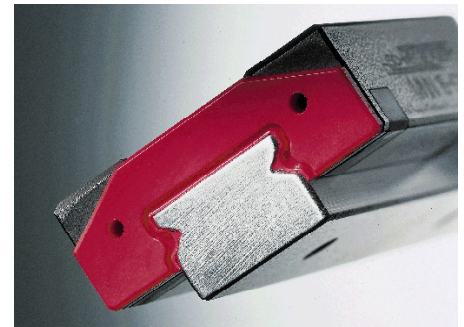


## SCHNEEBERGER - MINIRAIL is synonymous for reliability, competence and perfection in



### Installed and Lubricated for Clean-Room Conditions

Every single MINIRAIL - component is shipped clean. The complete assembly and the packaging are carried out in a clean-room environment. The lubrication is suitable for clean-room conditions. Our standard plastic packaging keeps the carriages and rails absolutely clean during shipping and storage.

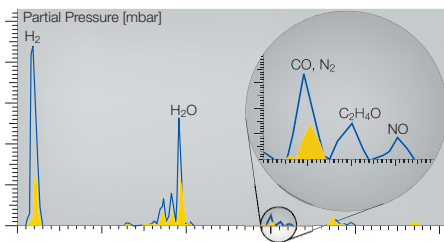

### Plastic Materials suitable for High-Vacuum Conditions

Laboratory test confirmed that elements identified, such as water ( $H_2O$ ) and hydrogen ( $H_2$ ) are not trapped in the MINIRAIL carriage body.



### Perfection with Plastic Plugs




Plastic plugs in the rail mounting holes prevent the accumulation of any dirt.

### Protective Packaging

Carriages and rails are packed carefully and ready for installation.

### Ball Retention Device for Easy Handling

If a carriage is removed from the rail or is being prepared for installation, the balls are always retained in the carriage by a special ball retaining device. This makes handling significantly easier and is a prerequisite for quickly changing the carriages.

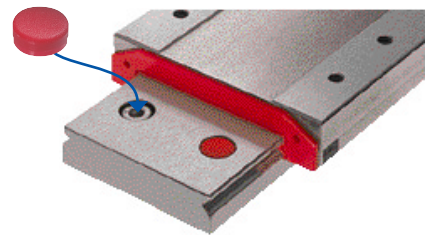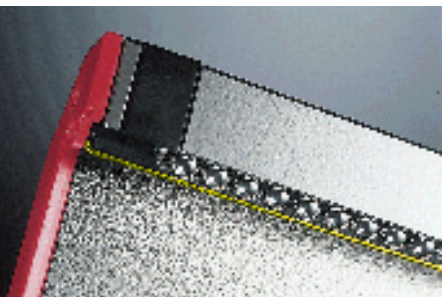


### MINIRAIL - Protective Rail

MINIRAIL - carriages are shipped on a protective rail, in order to prevent any impairment by dirt or debris.




all types of designs - all over the world.

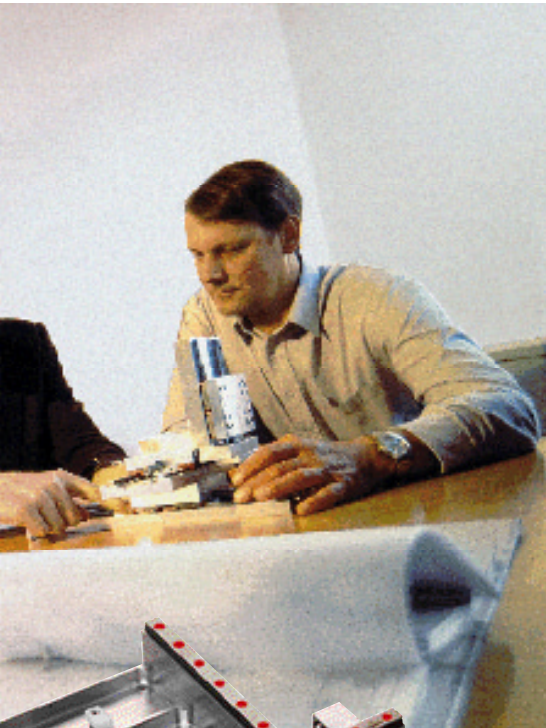


### Competent Application Engineering for a Longer Service Life

During your design phase, Schneeberger's competent engineers will assist you in the selection of a suitable product. With the optimal product selection and installation, the running characteristics of the MINIRAIL become effective and provide a long service life.

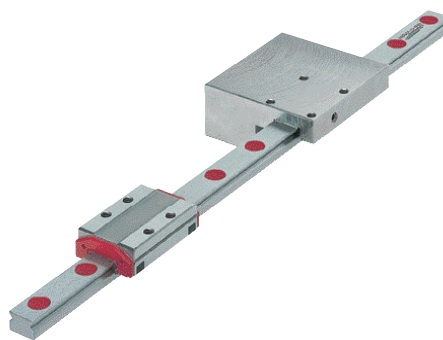

### Clamping Element for Safety Purposes

The clamping element has been developed especially for Schneeberger's MINIRAIL. In normal operation, the clamping element is maintained in an open position by compressed air, and in the case of an electric power failure, the spring-force blocks all movement for operational safety.

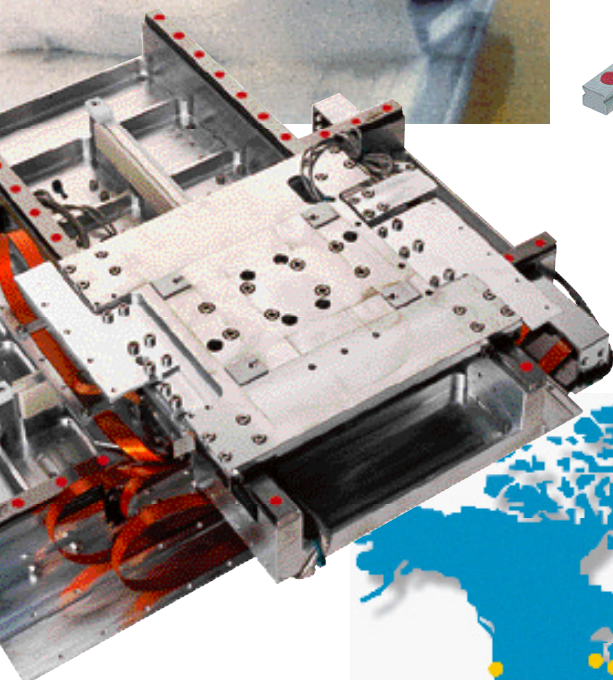


### SCHNEEBERGER – World-wide

With an extensive network of SCHNEEBERGER branch companies and exclusive representatives, we keep in contact with our customers all over the world.

Visit us at:

[www.schneeberger.com](http://www.schneeberger.com)

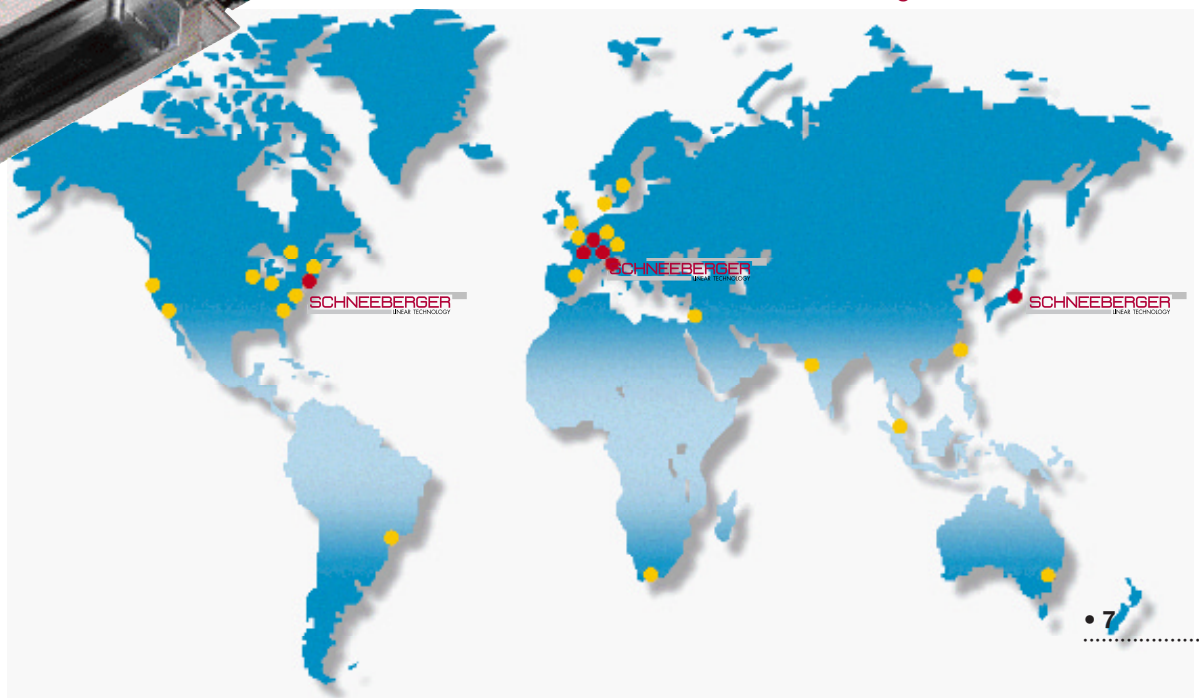





## 2.1 Accuracy classes

The MINIRAIL guideways are available in two accuracy classes.

Accuracy class	Tolerances	
	<sup>1</sup> A and B <sub>2</sub>	<sup>2</sup> Δ A and Δ B <sub>2</sub>
<b>G1</b>	± 10 μm	7 μm
<b>G3</b>	± 20 μm	15 μm
<sup>1</sup> Measuring referring to the center of the carriage		
<sup>2</sup> Dimension differences between two or more carriages measured at the middle of each carriage (mean value of both supports) and at the same rail position		

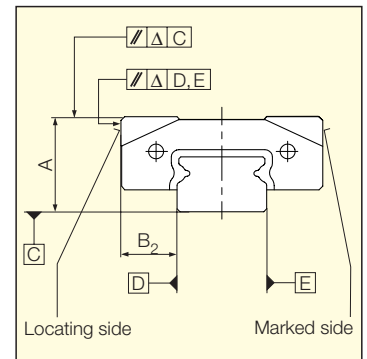

## 2.2 Running accuracy

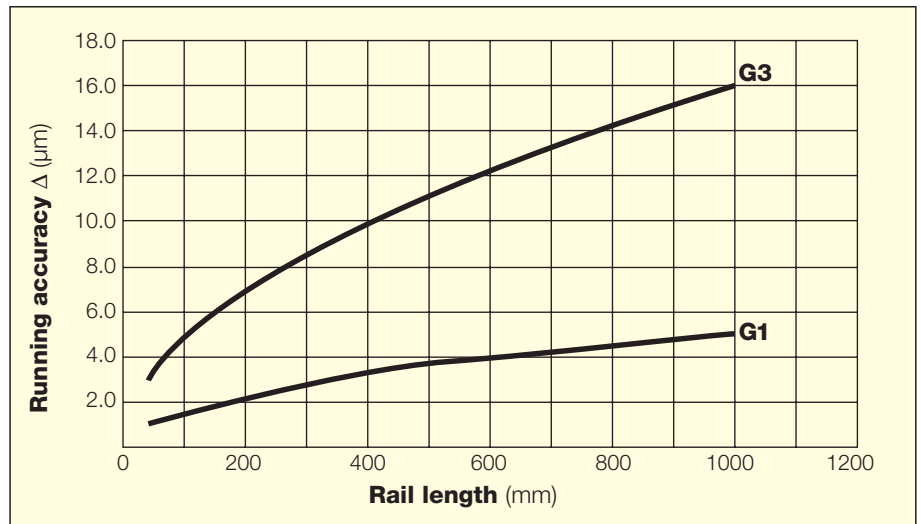

## 2.3 Preload classes V0, V1



Preloading increases the rigidity of the guideway but also affects operational life and increases translation resistance. The MINIRAIL system is available in two preload classes to address specific application requirements. The rail up to determines the preload classes.

Preload class	Preload	Accuracy class
<b>V0</b>	near clearance to $0.01 \cdot C$	G3
<b>V1</b>	0 to $0.03 \cdot C$	G1, G3

C = Dynamic loading capacity (see chapter 3.1 and 3.2)

## 2.4 Rail information

### Rail lengths

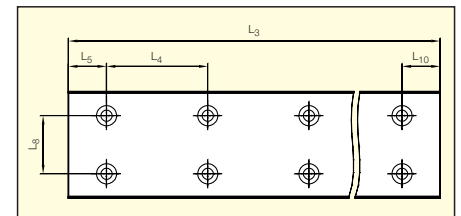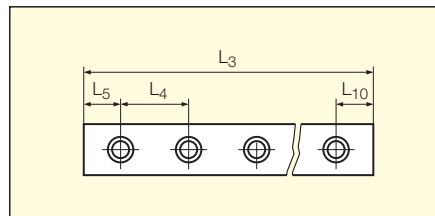

Standard rail lengths $L_3$ (length in mm)					
Size	$L_4$	$L_5, L_{10}$	$L_8$	$L_3$	Max $L_3$
<b>7</b>	15	5	–	40, 55, 70, 85, ..., 355	355
<b>9</b>	20	7.5	–	55, 75, 95, 115, ..., 695	695
<b>12</b>	25	10	–	70, 95, 120, 145, ..., 945	945
<b>15</b>	40	15	–	70, 110, 150, 190, ..., 950	950
<b>14</b>	30	10	–	80, 110, 140, 170, ..., 380	380
<b>18</b>	30	10	–	80, 110, 140, 170, ..., 980	980
<b>24</b>	40	15	–	110, 150, 190, 230, ..., 950	950
<b>42</b>	40	15	23	110, 150, 190, 230, ..., 950	950

### Custom rail lengths

Other rail lengths are available up to the maximum rail lengths above and are calculated according to the following formula:

$$L_3 = (n-1) \cdot L_4 + L_5 + L_{10}$$

$$n = 3, 4, 5 \dots (n = \text{number of attaching holes})$$


The following minimum and maximum values should be maintained for the starting hole pitch  $L_5$  and the end hole pitch  $L_{10}$ .

Minimum and maximum starting and end hole pitch $L_5, L_{10}$ (lengths in mm)								
Size	7	9	12	15	14	18	24	42
<b><math>L_5, L_{10}</math> minimum</b>	4	5	5	5	5	5	6	6
<b><math>L_5, L_{10}</math> maximum</b>	11	15	20	35	25	25	34	34

### Tolerances for rail lengths and attaching holes

The position tolerance of the attaching holes and the length tolerance is:

Rail	$L_3, X_n \leq 300 \text{ mm}$	$L_3, X_n > 300 \text{ mm}$
<b>t (mm)</b>	0.3	$0.001 \cdot X_n$
<b><math>L_3</math></b>	$\pm 0.3$	$\pm 0.001 \cdot L_3$

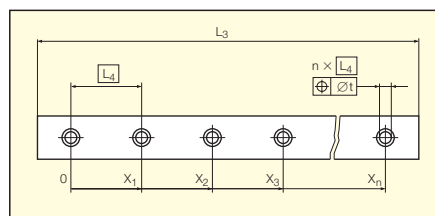

## 2.5 Lubrication

The front plates include two lubrication holes to allow independent lubrication for the right and left side of the carriage.

This ensures that all tracks of the carriage are provided with lubricant, in all installation orientations.

At delivery the carriages are slightly oiled. The required re-lubrication intervals as well as a lubrication prior to operation depend on the application and the operating conditions.

For lubrication with oil, SCHNEEBERGER recommends mineral oil CLP (DIN 51517) or HLP (DIN 51524) in the viscosity range of ISO VG32 to ISO VG150 in accordance with DIN 51519.

For lubrication with grease, SCHNEEBERGER recommends grease KP2K or KP1K in accordance with DIN 51825.

A re-lubrication set with an appropriate oil can be ordered at SCHNEEBERGER with the ordering code MNW.



### Basic lubrication with grease

Initial lubrication and re-lubrication according to table.

Basic lubrication with grease per carriage in cm <sup>3</sup>							
MNN 7	MNN 9	MNN 12	MNN 15	MNN 14	MNN 18	MNN 24	MNN 42
0.04	0.09	0.15	0.25	0.05	0.11	0.20	0.33

### Basic lubrication with oil

Initial lubrication and re-lubrication until oil escapes.

Re-lubrication:

Recommended values:

The basic lubrication is sufficient for 3000 km of travel, based on the following factors:

load ratio C/P = 10

speed = 1 m/s

stroke = 150 mm



## 2.6 General data

### Permissible speeds and accelerations

General applications under normal operating conditions:

Speeds up to	5 m/s
Accelerations up to	300 m/s <sup>2</sup>

### Permissible operating temperatures


MINIRAIL guideways can be used at operating temperatures between -40°C and +80°C. Short term temperatures up to +120°C are permissible.

### Materials

All steel parts are made from through hardened stainless steel. Plastic components are injection-molded using POM and TPE.


## Dimension tables and ordering information

### 3.1 Dimension table, loading capacities Sizes 7, 9, 12, 15

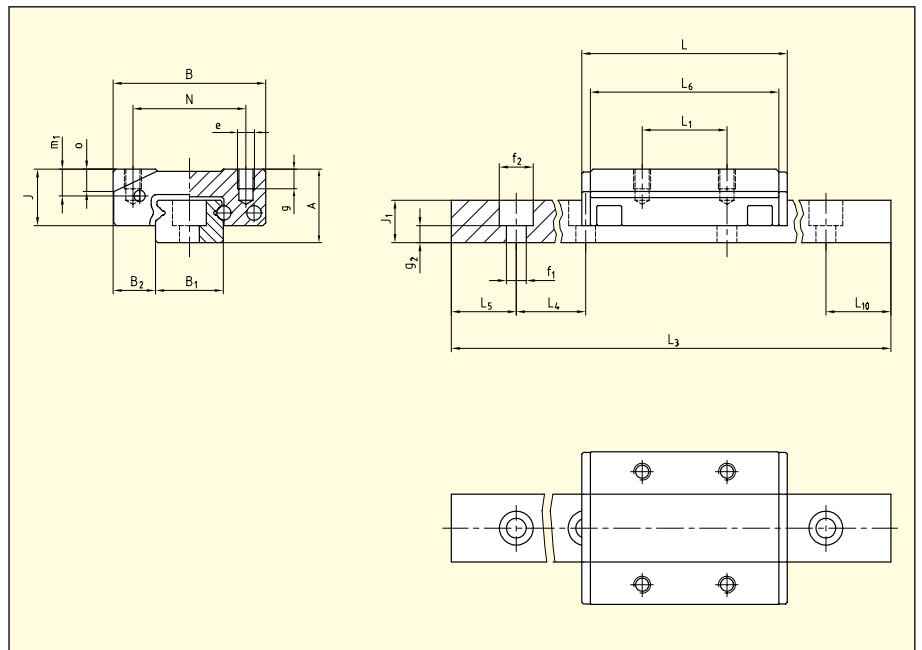

Type	Dimensions (mm)																		
	A	B	B <sub>1</sub>	B <sub>2</sub>	J	J <sub>1</sub>	L	L <sub>1</sub>	L <sub>4</sub>	L <sub>5</sub> / L <sub>10</sub>	L <sub>6</sub>	N	e	f <sub>1</sub>	f <sub>2</sub>	g	g <sub>2</sub>	m <sub>1</sub>	o
<b>MN 7</b>	8	17	7	5	6.5	4.5	24.6	8	15	5	22.1	12	M2	2.4	4.2	2.5	2.2	3.1	2.5
<b>MN 9</b>	10	20	9	5.5	8	5.5	32	10	20	7.5	29	15	M3	3.5	6	3	2	3.8	3.1
<b>MN 12</b>	13	27	12	7.5	10	7.5	36.4	15	25	10	33.4	20	M3	3.5	6	3.5	3	4.75	3.9
<b>MN 15</b>	16	32	15	8.5	12	9.5	43.7	20	40	15	40.7	25	M3	3.5	6	4	5	5.55	4.9

Type	Loading capacities		Moments				Weights Carriage Rail	
	C <sub>0</sub> (N)	C (N)	M <sub>0Q</sub> (Nm)	M <sub>0L</sub> (Nm)	M <sub>Q</sub> (Nm)	M <sub>L</sub> (Nm)	(g)	(g/m)
<b>MN 7</b>	1560	925	5.6	4.3	3.3	2.5	12.8	216.3
<b>MN 9</b>	2770	1690	12.9	10.2	7.9	6.2	23.9	308.8
<b>MN 12</b>	3900	2510	23.8	16.3	15.3	10.4	47.4	597.9
<b>MN 15</b>	5620	3680	42.7	28.1	27.9	18.4	81.4	995.5

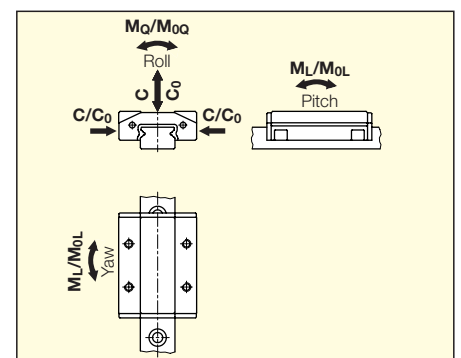

Loading capacities are calculated values, based on DIN 636-2


C<sub>0</sub> = static loading capacity

C = dynamic loading capacity (100 km)

M<sub>0</sub> = static moment


M = dynamic moment (100 km)

### 3.2 Dimension table, loading capacities Sizes 14, 18, 24, 42

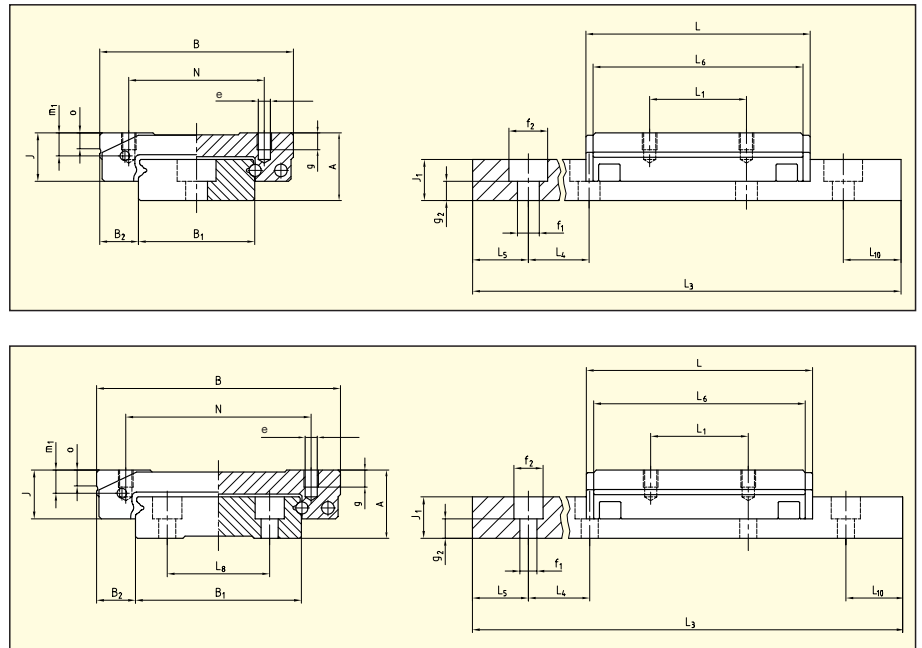

Type	Dimensions (mm)																			
	A	B	B <sub>1</sub>	B <sub>2</sub>	J	J <sub>1</sub>	L	L <sub>1</sub>	L <sub>4</sub>	L <sub>5</sub> / L <sub>10</sub>	L <sub>6</sub>	L <sub>8</sub>	N	e	f <sub>1</sub>	f <sub>2</sub>	g	g <sub>2</sub>	m <sub>1</sub>	o
MN 14	9	25	14	5.5	6.8	5.2	32.1	10	30	10	29.6	–	19	M3	3.5	6	2.8	2	3.3	2.2
MN 18	12	30	18	6	8.5	7	40	12	30	10	37	–	21	M3	3.5	6	3	2.5	4.3	3.1
MN 24	14	40	24	8	10	8.5	46.4	15	40	15	43.4	–	28	M3	4.5	8	3.5	4	4.75	3.9
MN 42	16	60	42	9	12	9.5	55.7	20	40	15	52.7	23	45	M4	4.5	8	4.5	5	5.5	4.9

Type	Loading capacities		Moments				Weights	
	C <sub>0</sub> (N)	C (N)	M <sub>0Q</sub> (Nm)	M <sub>0L</sub> (Nm)	M <sub>Q</sub> (Nm)	M <sub>L</sub> (Nm)	Carriage (g)	Rail (g/m)
<b>MN 14</b>	2340	1230	16.6	9.3	8.7	4.9	25	518.3
<b>MN 18</b>	3880	2140	35.5	19.4	19.6	10.7	47	914.6
<b>MN 24</b>	5630	3240	68.2	32.9	39.2	18.9	84	1473.0
<b>MN 42</b>	8110	4750	171.2	56.8	100.3	33.3	169	2828.4

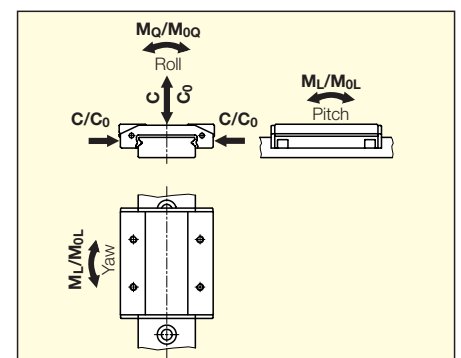


Loading capacities are calculated values, based on DIN 636-2  
 C<sub>0</sub> = static loading capacity  
 C = dynamic loading capacity (100 km)  
 M<sub>0</sub> = static moment  
 M = dynamic moment (100 km)



**3.3 Accessories** – must be ordered separately

**Plastic plugs MNK**

Plastic plugs can be used to close the rail attachment holes.

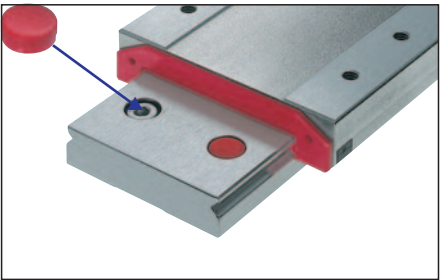

MINIRAIL Type	Plastic plugs Type	Plastic plugs can be combined with attaching screws of type		
		DIN 912	DIN 7984	ISO 7380
MN 7	MNK 4	—	—	X
MN 9	MNK 6	—	X	X
MN 12	MNK 6	X	X	X
MN 15	MNK 6	X	X	X
MN 14	MNK 6	—	X	X
MN 18	MNK 6	X	X	X
MN 24	MNK 8	—	X	X
MN 42	MNK 8	—	X	X

### 3.4 Ordering information MINIRAIL

The MINIRAIL carriage and guideway must be ordered as separate items.

#### Carriage MINIRAIL MNN

		—	MNN	9	- G1
Quantity					
Carriage type	<b>MNN</b>				
Size	<b>7, 9, 12, 15, 14, 18, 24, 42</b>				
Accuracy class	<b>G1, G3</b>				

#### Guideway MINIRAIL MN

		—	MN	9	-155	-7.5	-7.5	- G1	-V1
Quantity									
Guideway type	<b>MN</b>								
Size	<b>7, 9, 12, 15, 14, 18, 24, 42</b>								
Rail length	<b>L<sub>3</sub></b> (in mm)								
Starting hole pitch	<b>L<sub>5</sub></b> (in mm)*								
End hole pitch	<b>L<sub>10</sub></b> (in mm)*								
Accuracy class	<b>G1, G3</b>								
Preload class	<b>V0, V1</b>								

\* Indicate only if special pitch

#### Accessories MINIRAIL MN

##### Re-lubrication set

		—	MNW
Quantity			
Type	<b>MNW</b>		

##### Plastic plugs MNK

		—	MNK	6
Quantity				
Type	<b>MNK</b>			
Size	<b>4, 6, 8</b>			

#### 4.1 Dynamic loading capacity C

The loading capacity values for anti-friction guideways are based on the principles specified by the ISO for calculation of rolling-contact bearings (DIN ISO 281).

Dynamic loading capacity is the loading which results in a nominal operational life corresponding to a translation distance of 100 000 m (100 km) provided that the loading due to mass and direction is unchanged and the line of influence acts vertically on the rolling-contact bearing unit.

#### Comparison of loading

Other suppliers often indicate their loading capacities for a translation distance of 50 000 m (50 km). These values according to JIS standard are above the values according to DIN ISO. The recalculation of the loading capacities is done as follows:

$$C_{50} = 1.26 \cdot C_{100}$$

#### Operational life calculation

The nominal calculated operational life L for the equivalent force P and a dynamic loading capacity C is:


$$L = (C/P)^3 \cdot 10^5 \text{ m} \quad L = \text{nominal life (m)}$$

#### Operational life calculation in hours

$$L_h = \frac{L}{2 \cdot s \cdot n \cdot 60} = \frac{L}{60 \cdot v_m}$$

$L_h$  = nominal life (h)  
 $s$  = stroke length (m)  
 $n$  = stroke frequency (min<sup>-1</sup>)  
 $v_m$  = average traversing speed (m/min)



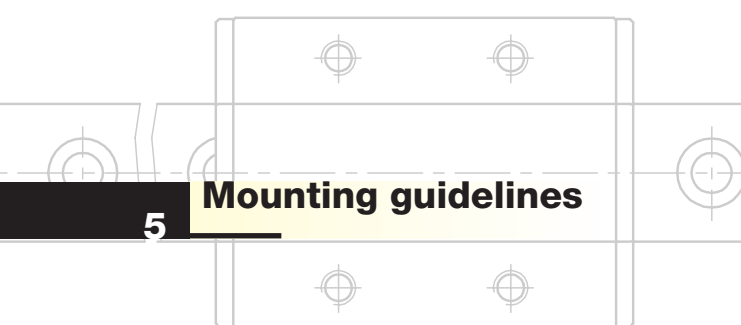

## 5.1 Tightening torques for rails and carriages

### Tightening torques for fastening screws DIN 912, $\mu$ 0,125 (12,9) and DIN 912, $\mu$ 0,2 (A2-70)


Strength-class	max. tightening torques [Nm]		
	M2	M3	M4
12.9	0.6	2.1	5.0
A2-70	0.3	1.1	2.6

#### Notes

- When the screws are greased with grease containing MoS<sub>2</sub> the friction coefficient  $\mu$  can be reduced by as much as half. As the tightening torques required to reach the maximum permissible tightening force depend on the friction coefficient, they must be reduced accordingly. The values can be obtained from the screw manufacturer's information or from the specialist literature. If necessary, carry out tests to determine the actual friction coefficient.
- Refer to the screw manufacturer's information. This is always binding.

## 5.2 Configuration of the lateral locating sides

The corners between the support and locating surfaces of the surrounding structure are normally provided with a relief groove. However, if no relief groove is provided, then the dimensions tabulated below must be maintained.

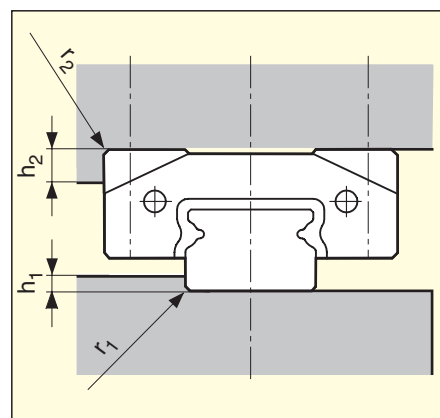

Size	$h_1$	$r_1 \text{ max}$	$r_2 \text{ max}$	$h_2$
<b>7</b>	1.2	0.2	0.3	2.5
<b>9</b>	1.5	0.3	0.4	3
<b>12</b>	2.5	0.4	0.4	4
<b>15</b>	3.5	0.5	0.5	5
<b>14</b>	1.8	0.2	0.4	2
<b>18</b>	3	0.3	0.5	3
<b>24</b>	3.5	0.4	0.5	4
<b>42</b>	3.5	0.5	0.6	5

## 5.3 Configuration of assembly surfaces


MINIRAIL advantages can only be achieved when mounted to a rigid, accurately machined structure.

The surface quality of the supporting structure has no direct influence on the operational and run-out behavior. A roughness average ratio of  $R_a$  0.4 to 1.6  $\mu\text{m}$  is recommended for support and locating surfaces.

Inaccuracies of the attachment surfaces are partially compensated by the elastic deformation of the MINIRAIL. However, they may affect overall accuracy, running behavior and operational life.

#### 5.4 Geometrical and position accuracy of the support surfaces


Permissible height deviation (use values in mm for the calculation).

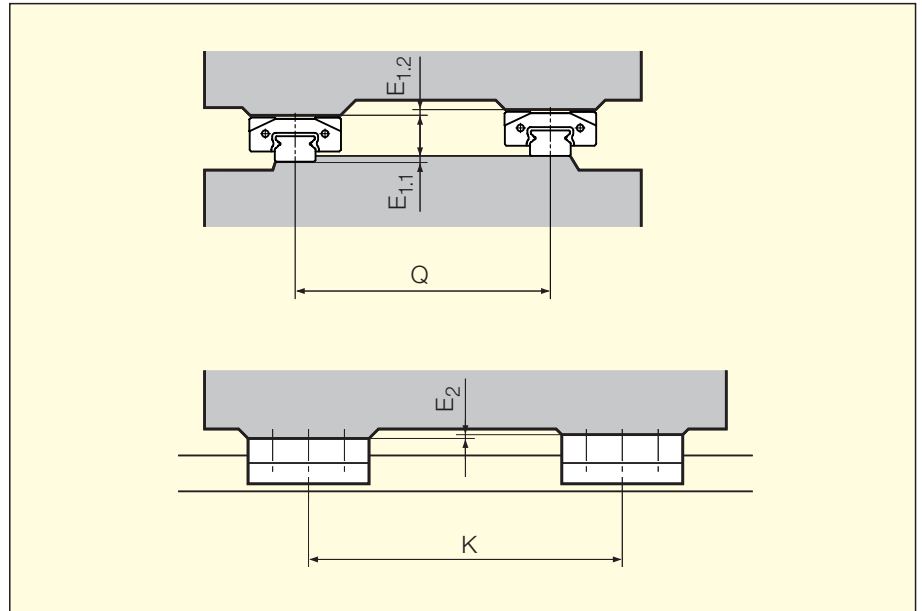

	MNN	V0	V1
$E_1 = E_{1.1} + E_{1.2}$	7, 9, 12, 15	0.00025 Q	0.00015 Q
$E_2$	7, 9, 12, 15	0.00005 K	0.00005 K
$E_1 = E_{1.1} + E_{1.2}$	14, 18, 24, 42	0.00013 Q	0.00008 Q
$E_2$	14, 18, 24, 42	0.00004 K	0.00004 K

#### 5.5 Parallelism tolerances of the locating surfaces

Permissible tolerances for the parallelism.

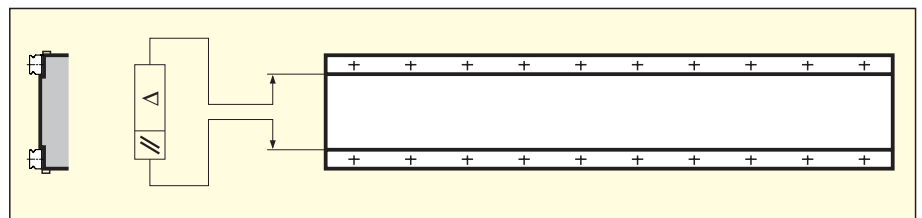

Tolerances for preload class (mm))				
	7 / 14	9 / 18	12 / 24	15 / 42
V0	0.003	0.005	0.008	0.01
V1	0.002	0.003	0.004	0.005

## 5.6 Various

### Mounting instructions

The installation of the MINIRAIL guideways is described in detail in the separate

- **Mounting Instructions MINIRAIL** and can be downloaded from **[www.schneeberger.com](http://www.schneeberger.com)** at menu SERVICES or be ordered from SCHNEEBERGER.

### As delivered condition

The SCHNEEBERGER MINIRAIL guideways are delivered in protective packaging. The carriages are mounted on a plastic rail and slightly oiled for immediate operation.



### Transportation and intermediate storage

The MINIRAIL guideways are highly precise components, which have to be treated with care. As a protection against damage, the following instructions should be followed:

- Always store and transport MINIRAIL guideways in their original packaging.
- Protect the guideways against impacts and dampness/humidity.



**SWITZERLAND**

W. Schneeberger AG  
CH-4914 Roggwil/BE  
Phone 062 918 41 11  
Fax 062 918 41 00

E-Mail:  
info-ch@schneeberger.com  
[www.schneeberger.com](http://www.schneeberger.com)

**GERMANY**

Schneeberger GmbH  
75339 Höfen/Enz  
Phone 07081 782-0  
Fax 07081 782-124

E-Mail:  
info-d@schneeberger.com

**ITALY**

Schneeberger S.p.A  
21021 Angera VA  
Phone 0331 93 20 10  
Fax 0331 93 16 55

E-Mail:  
info-i@schneeberger.com

**FRANCE**

Schneeberger  
Technique Linéaire SARL  
91222 Brétigny-sur-Orge  
Phone 01 69 88 50 00  
Fax 01 60 84 96 02

E-Mail:  
info-f@schneeberger.com

**USA**

Schneeberger Inc.  
Bedford, MA 01730  
Phone +1 781-271-0140  
+1 800-854-6333  
Fax +1 781-275-4749

E-Mail:  
info-usa@schneeberger.com