

Linear Stage

The **HIWIN** Linear Motion Stage KS is one of the newest motor-driven ballscrew module in which is equipped with dust-proof strip so that prevent from wear particles flying out. Based on the dust-proof designed, this linear stage is the most suitable product for the applications of semi-conductor manufacturing, LED examination or medical equipment...etc.

NEW Patent Pending
KS TYPE



Features

- ◆ Low cost and compact
- ◆ Dust-proof designed
- ◆ Precision and high speed
- ◆ Easy installation
- ◆ Design Optimization:
The structure is designed for high Stiffness and light weight. The FEM Analysis is shown beside.

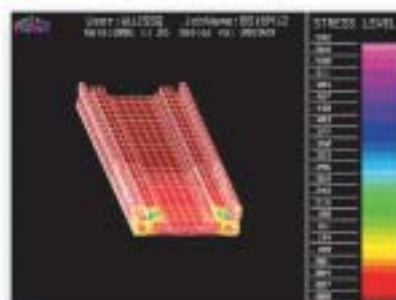



Figure 1.

Applications

- ◆ Semi-conductor manufacturing
- ◆ LED examination
- ◆ Medical equipment
- ◆ Wafer movement

Description of Serial Number

Example: KS18-0300P60-M75 2 1

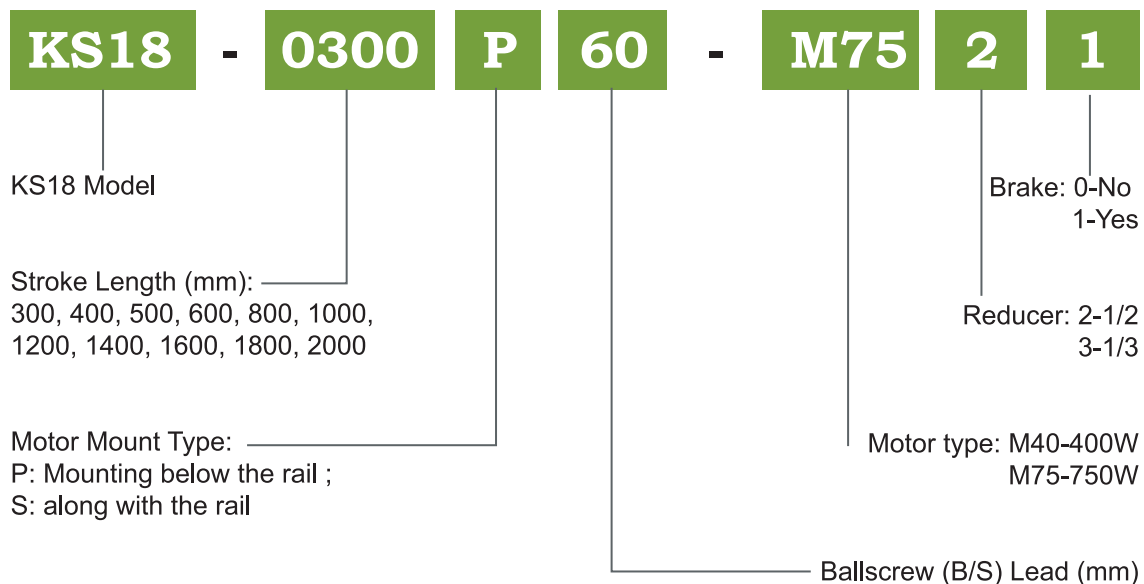

Note:

For the Motor type and the following Roman numerals, it shows no symbol if the motor will not be needed. Ex: KS18-0300P60

Specification

KS-P type

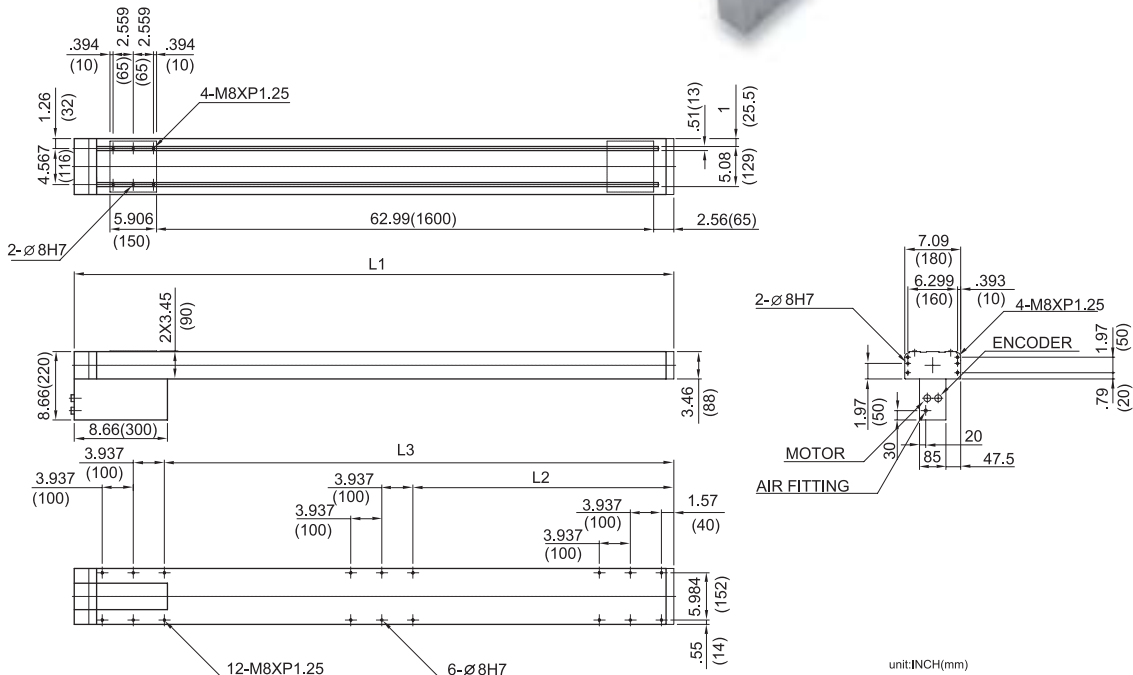


Table1.

Model	Dimensions (mm)			Stroke Length (mm)	Repeatability (mm)	Operation Tem. (°C)	Weight (kg)
	L1	L2	L3				
KS18-030P	630	190	340	300	±0.01	0~40	34
KS18-040P	730	240	440	400	±0.01	0~40	36
KS18-050P	830	290	540	500	±0.01	0~40	38
KS18-060P	930	340	640	600	±0.01	0~40	44
KS18-080P	1130	440	840	800	±0.01	0~40	44
KS18-100P	1330	540	1040	1000	±0.01	0~40	48
KS18-120P	1530	640	1240	1200	±0.01	0~40	52
KS18-140P	1730	740	1440	1400	±0.01	0~40	56
KS18-160P	1930	840	1640	1600	±0.01	0~40	60
KS18-180P	2130	940	1840	1800	±0.01	0~40	64
KS18-200P	2330	1040	2040	2000	±0.01	0~40	68

KS-S type

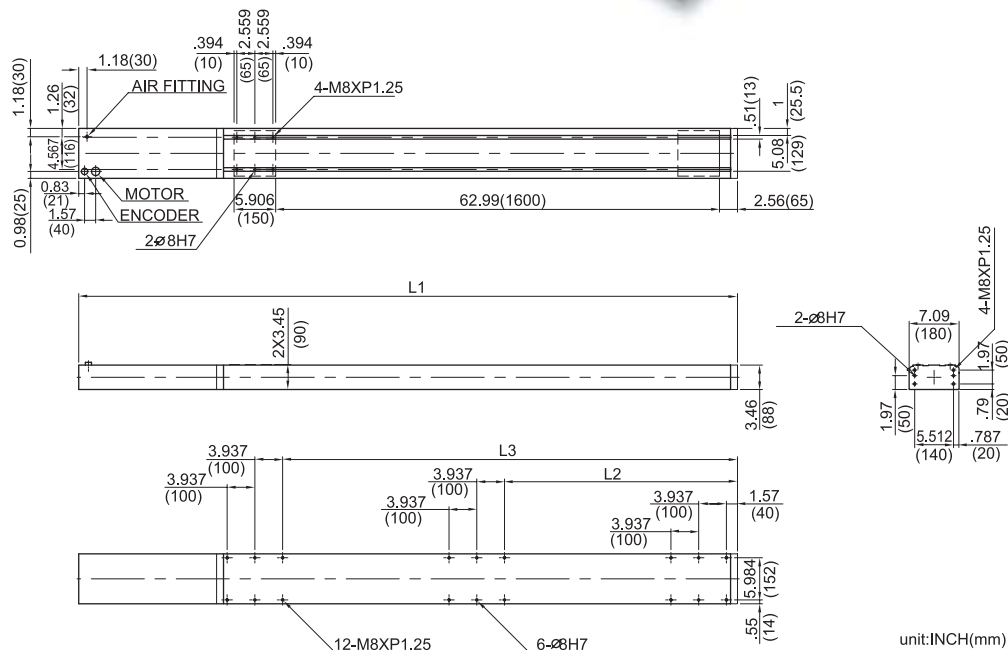


Table2.

Model	Dimensions (mm)			Stroke Length (mm)	Repeatability (mm)	Operation Tem. (°C)	Weight (kg)
	L1	L2	L3				
KS18-030S	1075	190	340	300	±0.01	0~40	34
KS18-040S	1175	240	440	400	±0.01	0~40	36
KS18-050S	1275	290	540	500	±0.01	0~40	38
KS18-060S	1375	340	640	600	±0.01	0~40	40
KS18-080S	1575	440	840	800	±0.01	0~40	44
KS18-100S	1775	540	1040	1000	±0.01	0~40	48
KS18-120S	1975	640	1240	1200	±0.01	0~40	52
KS18-140S	2175	740	1440	1400	±0.01	0~40	56
KS18-160S	2375	840	1640	1600	±0.01	0~40	60
KS18-180S	2575	940	1840	1800	±0.01	0~40	64
KS18-200S	2775	1040	2040	2000	±0.01	0~40	68

Examination of resolution and travel speed

RESOLUTION

$$R = \frac{L}{P \times e}$$

L : Ballscrew Lead (mm)

P : Number of division per revolution of motor (pulse/r)

e : Gear reducer ratio

R : Resolution (least input increment)

Example:

Ballscrew lead: 60 mm

Number of division per revolution of motor: 2000 pulse/r

Gear reducer ratio: 5

$$\text{Resolution} = \frac{60}{2000 \times 5} = 0.006 \text{ mm}$$

TRAVEL SPEED

$$V = L \times \frac{N}{e}$$

L : Ballscrew Lead (mm)

N : Allowable maximum motor speed (r/min)

e : Gear reducer ratio

V : Travel speed

Example:

Ballscrew lead: 60 mm

Allowable motor speed: 3,000 r/min

Gear reducer ratio: 5

$$\begin{aligned} \text{Travel speed} &= 60 \times \frac{3000}{5} = 36,000 \text{ mm/min} \\ &= 36 \text{ m/min} = 600 \text{ mm/sec} \end{aligned}$$

Service Life

Three main component of the linear stage KS are guideway, ballscrew and bearing. The Calculation formulas of their life are shown as follows:

GUIDEWAY

$$L = \left(\frac{f_t}{f_w} \times \frac{C}{P_n} \right)^3 \times 50 \text{ km}$$

L : Life Rating (km)

C : Basic Dynamic Load Rating (N), 1650N

P_n : Calculating Loading (N)

f_t : Temperature Coefficient (ref. Table 1)

f_w : Loading Coefficient (ref. Table 2)

Table 1

$^{\circ}\text{C}$	100	150	200	250
f_t	1.0	0.9	0.8	0.7
				0.6

Table 2

Thrust and Vibration	Velocity (V)	f_w
No Thrust	$V < 15 \text{ m/min}$	1 ~ 1.5
Low Vibration	$15 < V < 60 \text{ m/min}$	1.5 ~ 2
High Vibration	$V < 60 \text{ m/min}$	2 ~ 3.5

BALLSCREW AND BEARING

$$L = \left(\frac{I}{f_w} \times \frac{C_a}{F_{a,n}} \right)^3 \times 10^6 \text{ rev}$$

L : Life Rating (rev.)

C_a : Basic Dynamic Load Rating (N), 8683N

$F_{a,n}$: Axial Loading (N)

f_w : Loading Coefficient (ref. Table 2)

Example of KS-Type for special applications

EX. 1



EX. 2



EX. 3



EX. 4



The specifications in this catalogue are subject to change without notification.

HIWIN®

YOUR 21ST CENTURY PARTNER IN TECHNOLOGY INNOVATION



HIWIN TECHNOLOGIES CORP.

No. 46, 37th Road
Taichung Industrial Park
Taichung 407, TAIWAN
Tel : +886-4-23594510
Fax: +886-4-23594420
<http://www.hiwin.com.tw>
E-mail: business@mail.hiwin.com.tw

HIWIN GmbH

Brücklesbünd 2, D-77654
Offenburg, GERMANY
Tel : +49-781-93278-0
Fax: +49-781-93278-90
<http://www.hiwin.de>
E-mail: info@hiwin.de

HIWIN CORPORATION

● **KOBE**
3F. Sannomiya-Chuo Bldg.
4-2-20 Goko-Dori. Chuo-Ku
KOBE 651-0087, JAPAN
Tel : +81-78-2625413
Fax: +81-78-2625686
<http://www.hiwin.co.jp>
E-mail: info@hiwin.co.jp

● **TOKYO**
Tel : +81-3-35988413
Fax: +81-3-35988414
● **CHUBU-EIGYOSHO**
Tel : +81-587-913451
Fax: +81-587-913449
● **KUMAMOTO**
Tel : +81-96-3402282
Fax: +81-96-3402286

HIWIN CORPORATION

● **CHICAGO**
520 Business Center Drive
Mount Prospect, IL 60056, U.S.A.
Tel : +1-847-8272270
Fax: +1-847-8272291
<http://www.hiwin.com>
E-mail: info@hiwin.com

● **SILICON VALLEY**
Tel : +1-408-9430290
Fax: +1-408-9430891
<http://www.hiwinmikro.com>
E-mail: info@hiwinmikro.com

HIWIN SCHWEIZ

PO Box 1367
Alte Landstr. 188, CH-8800 Thalwil
SWITZERLAND
Tel : +41-43-3550330
Fax: +41-43-3550331
<http://www.hiwin.ch>
E-mail: info@hiwin.ch

HIWIN S.R.O.

Lozibky 15
61400 Brno,
CZECH REPUBLIC
Tel/Fax: +420-5-485-28238
<http://www.hiwin.cz>
E-mail: hiwin@sky.cz